


**MSMDxxxM10-54**  
**182 M10 cells half cut**

**390W-410W**



## KEY FEATURES

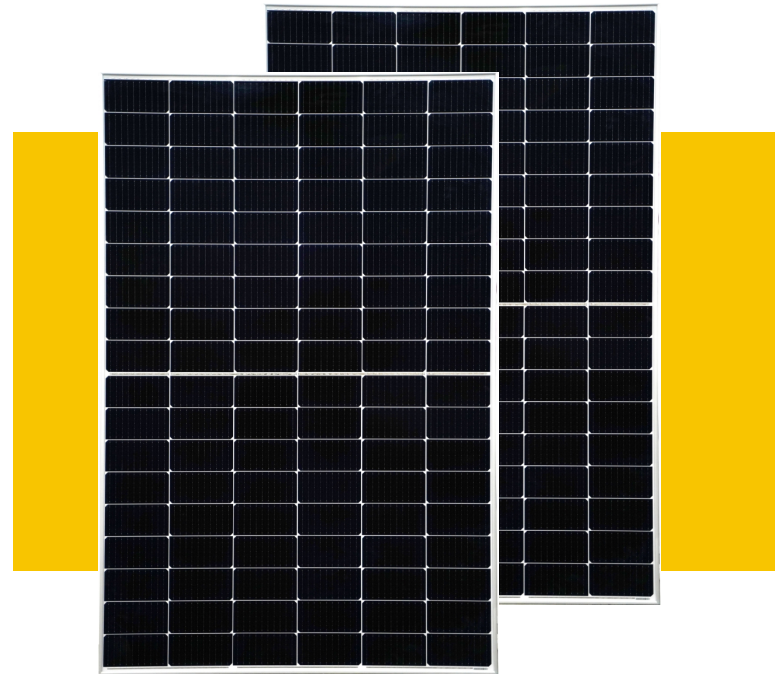

Class A fire resistant (possible on request)



Outstanding performance in low-light conditions



Low temperature coefficient (Pmax): -0.34%/°C

**+5W**

0~+5W positive tolerance- to assure high output



Lower internal current, lower hot spot temperature



Cell crack risk limited in small region, enhance the module reliability

**PID FREE**

Excellent anti-PID module design, TÜV SÜD certified



Certified to withstand high wind loads (32400 pa) and snow loads (5400 pa)




Salt mist and ammonia corrosion resistant

## PRODUCT CERTIFICATES



## WARRANTY

- Our linear power guarantee
- Standard linear power guarantee

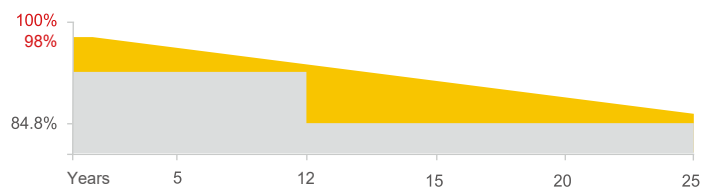

**12**  
years

Enhanced product guarantee on product and workmanship

**25**  
years

Linear power output warranty

